



EL-LULA

EL-803

COMMERCIAL

Elevator with limited access and use designed for small commercial buildings and prestige homes. EL-LULA is a choice not unlike a conventional elevator and it makes moving from one floor to another without a hitch.

Moving with confort & safety!

 **OPLIFT**
vertical mobility

info@oplift.ca | www.oplift.ca | 1 800 311-9977 | 450 773-9977
6555 Choquette Avenue, Saint-Hyacinthe, Québec J2S 8L2

This device is in accordance with the CAN/CSA-B44 • ASME A17.1 standard. It can be installed in any public, residential or commercial facility. Québec product.

RBQ : 8277-1106-03.

EL-LULA

EL-803

PRODUCT
BROCHURE




| | |
|-------------|----------------------------|
| Device type | LULA ELEVATOR / COMMERCIAL |
| # Model | EL-803 |

MAIN SPECIFICATIONS

| | |
|-----------------------|--|
| Applicable norms | CSA-B44-07, ASME A17.1 |
| Course / Trajectory | Maximum 25' (7620 mm). Calculated from the lower floor to the top floor. |
| Capacity / Rated load | Maximum 1400 lb (635 kg) |

CABIN

| | |
|-------------------------|--|
| Cabin dimensions | Maximum 18'² (1.67 m²) Various formats are available, such as: - 48" X 54" (1219 mm X 1372 mm) - 42" X 60" (1067 mm X 1524 mm) Standard: 80" (2032 mm) **Option: 96" (2438 mm) |
| Cabin height | 86" (2184 mm) |
| Possible configurations | |

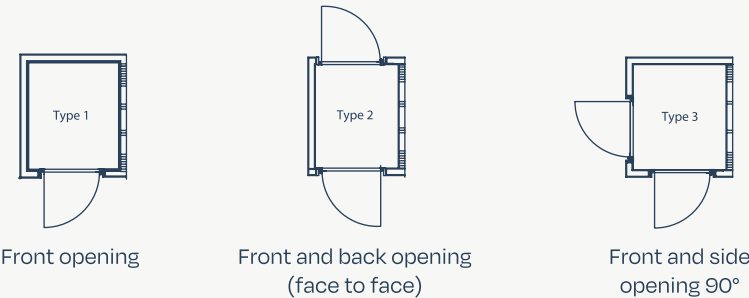

| | |
|--------------------|--|
| Cabin panels walls | Fire-retardant laminate (Choice of available colours) Options: Stainless steel – Mirror panels ** Special requests from the architect are possible. |
| Handrails | Stainless steel ** Special models are possible on request. |

DOORS

| | |
|-------------------------|---|
| Landing doors and cabin | Automatic 2-speed sliding doors. Finish: #4 stainless steel or beige painted steel. Net opening: 36" (914 mm) X 84-5/8" (2149,475 mm) Option of hinged landing doors with a motorized folding cabin door for special needs |
|-------------------------|---|

DRIVE MACHINE

| | |
|----------------|---|
| Driving system | Hydraulic with cables |
| Movement speed | Maximum 30'/minute (0.15m/second). Soft-start/Soft-stop). |

See the EL-803 technical sheet for more information.

